

A close-up, high-contrast photograph of several hydraulic hose fittings. The fittings are made of polished metal, likely stainless steel, and feature hexagonal nuts and flared ends. They are connected to black hydraulic hoses. The background is dark and out of focus, emphasizing the intricate details and metallic sheen of the components.

STORENG

Tapas de tanque
hidráulico

STORENG


BREATHER - FSB / TB




- CHROME PLATED STEEL CAP - VENTS UNDERNEATH
- ALTERNATE CAP FINISH BLACK POWDER COATED
- FILTRATION 40 MICRONS STANDARD / OPTIONAL 10 & 3 MICRONS
- AIR FLOWS TO 25 CFM (750 LPM)
- RUGGED CAST ALUMINIUM HOUSING (FOR BM MODEL)
- METAL STRAINER - STANDARD
- HARDWARE INCLUDES GASKETS & (10-32) SCREWS




FLANGE TYPE

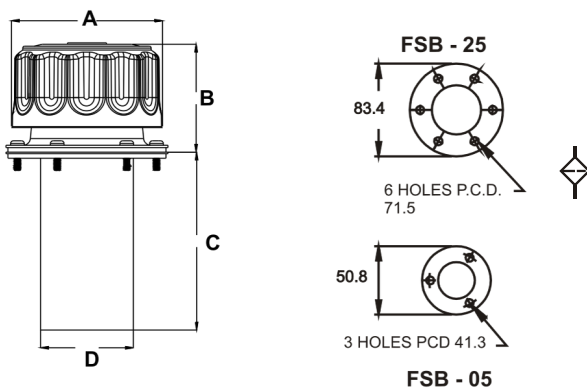


FLANGE TYPE
HIGH NECK

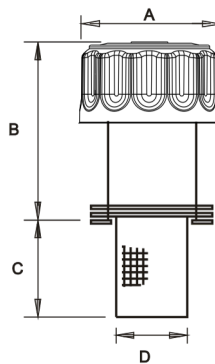

OPTIONAL FEATURES

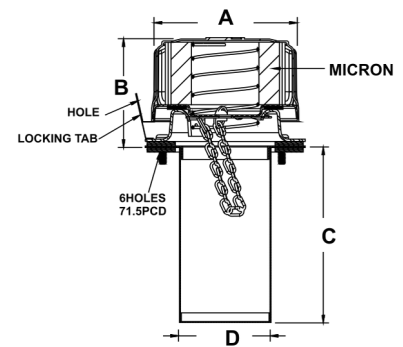


FSB-25 HN

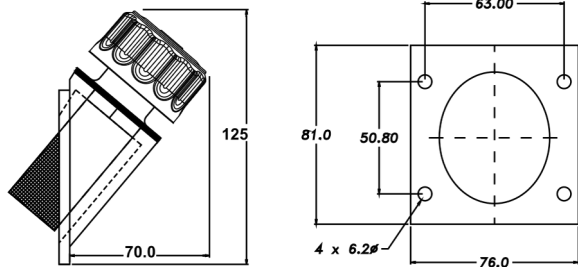


FSB - 05 BM

PUSH ON TYPE
PB-25

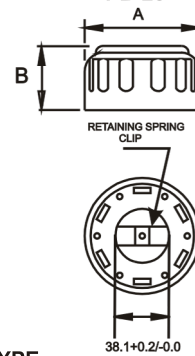


SIDE MOUNT

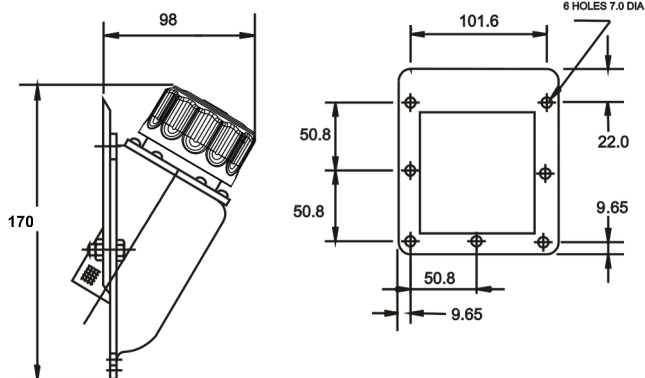


FSB - 25 BM

WELD TYPE

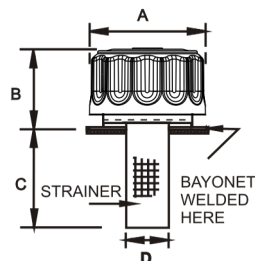

FSBW - 25

WELD TYPE
HIGH NECK



FSBW - 25 HN

OPTIONAL / SPECIAL FEATURE (CONSULT FACTORY) - OMIT IF NOT REQUIRED

STORENG

BREATHER - FSB / TB



MODEL	DISPLACEMENT		RATING MICRONS	A	B	C *	D	WT KGS
FSB - 05	150	LPM	40	46	52	65	28	0.10
FSB - 05 - 10	90	LPM	10	46	52	65	28	0.10
FSB - 25	720	LPM	40	77	52	91	48	0.25
FSB - 25 - 10	400	LPM	10	77	52	91	48	0.25
FSBW - 25	720	LPM	40	77	52	87	30	0.25
FSB - 25-HN 1	720	LPM	40	77	73	91	48	0.35
FSB - 25-HN 3	720	LPM	40	77	110	91	48	0.40
FSBW - 25-HN 1	720	LPM	40	77	73	81	30	0.35
FSBW - 25-HN 3	720	LPM	40	77	110	55	30	0.40
PB - 25	720	LPM	40	77	50	-	-	0.21

MODEL CODE : ASSEMBLY


FSB *	- 25	- * *	- BM	- **	- **	- ***	- *
SERIES	CAPACITY CFM	FILTRATION μ MICRONS	FEATURE OPTIONAL (1)	STRAINER C * OPTIONAL(2)	FEATURE 1 OPTIONAL # (OMIT IF NOT REQD)	FEATURE 2 OPTIONAL # (OMIT IF NOT REQD)	FEATURE 3 OPTIONAL # (OMIT IF NOT REQD)
FSB	05 (150 LPM)	40 - 40 μ Std	BM - SIDE MOUNT	STD		CONSULT FACTORY	B - BLACK POWDER COATED CAP
FSB	25 (750 LPM)	10 - 10 μ Nom	BM - SIDE MOUNT	L 4 - STD	LT - LOCKING TAB	DS 4 - DIP STICK 4"	
FSBW		03 - 3 μ Nom	HN 1- HIGH NECK 1.5" HN 3- HIGH NECK 3"	L 6 - 152 m m L 8 - 203 m m	P5 - Pressurised 5psi SG - SPLASH GUARD	DS 6 - DIP STICK 6" DS 8 - DIP STICK 8"	

OPTIONAL / SPECIAL FEATURE (CONSULT FACTORY) - OMIT IF NOT REQUIRED


STORENG BREATHER - TB



THREADED TYPE



TB - 35
TB - 65
TB - 165



TB - 05
TB - 25




MODEL	DISPLACEMENT		RATING MICRON	A	B	C STD IN BSPP	E	A / F	WT KGS
TB . 05 .	150	LPM	40						
				45	66	1/4"	8	25	0 . 13
TB . 05 . 10	90	LPM	10						
TB . 25 .	720	LPM	40						
				77	66	3/4"	10	30	0 . 25
TB . 25 . 10	400	LPM	10						
TB . 35 .	1000	LPM	10	110	138	1 - 1/2"	12	55	0 . 40
TB . 65 .	2000	LPM	10	145	145	2"	15	65	0 . 55
TB . 165 .	4000	LPM	10	185	195	2 - 1/2"	15	80	1 . 30

Note : TB 35 / 65 / 165 Nylon Housing


MODEL CODE : ASSEMBLY

TB	- 05	- 10	- * * *	- P	- *
SERIES	CAPACITY	FILTRATION	THREADS	FEATURE	FEATURE 3
	CFM	μ MICRONS	OPTIONAL #	SPECIAL #	OPTIONAL # (OMIT IF NOT REQD)
TB	05	40 - 40 μ Std	02* - 1/4" * B / N	P - PRESSURISED (5 P S I)	B - BLACK POWDER COATED CAP
			04S - 7/16" - 20 UNF		
			03* - 3/8" * B / N		
			06S - 9/16" - 18 UNF		
			04* - 1/2" * B / N		
			08S - 3/4" - 16 UNF		
	25	10 - 10 μ Nom	04* - 1/2" *B / N	SG - SPLASH GUARD	
			08S - 3/4" - 16 UNF		
			06* - 3/4" * B / N		
			12S - 1-1/16" - 12 UNF		
			08* - 1" * B / N		
			16S - 1-5/16" - 12 UNF		
	35	10 - 10 μ Nom	10* - 1 - 1/4" * B / N	DS 4 - DIP STICK 4"	
			20S - 1-5/8" - 12 UNF		
			12* - 1 - 1/2 " * B / N		
24S - 1-7/8" - 12 UNF					
65	10 - 10 μ Nom	16* - 2" * B / N	DS 6 - DIP STICK 6" (Ref - H3)		
		32S - 3" - 12 UNF			
165	10 - 10 μ Nom	20* - 2-1/2" * B / N			DS 8 - DIP STICK 8"
		40S - 3-1/2" - 12 UNF			

P - FEATURE

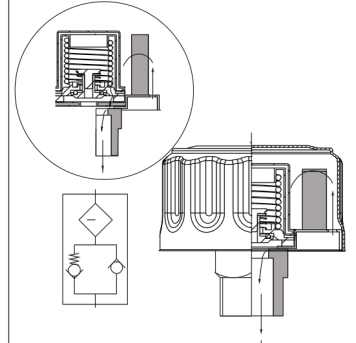

- BUILT IN VALVE ASSEMBLY HELPS TO MAINTAIN PRESET PRESSURE (5 P S I) IN THE TANK.
- ALLOWS FREE FLOW OF AIR INTO THE TANK IF PRESSURE FALLS BELOW ATMOSPHERIC.
- IF PRESSURE INSIDE TANK INCREASES VALVE RELEASES AT PRESET PRESSURE (5 P S I)
- DISPLACED AIR IS FILTERED & CLEAN



OPTIONAL / SPECIAL FEATURE (CONSULT FACTORY) - OMIT IF NOT REQUIRED

Distribuye

STORENG

+56 9 5130 9193

Whatsapp y móvil.